

# ME/SE 740

## Lecture 18

### Elbow Manipulator: Inverse Kinematics Problem Solutions

Recall from Lecture 15 the DH table for the Elbow Manipulator:

$i$	$a_i$	$\alpha_i$	$d_i$
1	0	$90^\circ$	0
2	$a_2$	0	0
3	$a_3$	0	0
4	$a_4$	$-90^\circ$	0
5	0	$90^\circ$	0
6	0	0	0

Where  $T_6^0 = T$  is given by:

$$T = A_1(\theta_1)A_2(\theta_2)A_3(\theta_3)A_4(\theta_4)A_5(\theta_5)A_6(\theta_6) = \begin{pmatrix} n_x & o_x & a_x & p_x \\ n_y & o_y & a_y & p_y \\ n_z & o_z & a_z & p_z \\ 0 & 0 & 0 & 1 \end{pmatrix}$$

with:

$$\begin{aligned} A_1 &= \begin{pmatrix} \cos \theta_1 & 0 & \sin \theta_1 & 0 \\ \sin \theta_1 & 0 & -\cos \theta_1 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix} \\ A_i &= \begin{pmatrix} \cos \theta_i & -\sin \theta_i & 0 & a_i \cos \theta_i \\ \sin \theta_i & \cos \theta_i & 0 & a_i \sin \theta_i \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}, \quad i = 2, 3 \\ A_4 &= \begin{pmatrix} \cos \theta_4 & 0 & -\sin \theta_4 & a_4 \cos \theta_4 \\ \sin \theta_4 & 0 & \cos \theta_4 & a_4 \sin \theta_4 \\ 0 & -1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix} \\ A_5 &= \begin{pmatrix} \cos \theta_5 & 0 & \sin \theta_5 & 0 \\ \sin \theta_5 & 0 & -\cos \theta_5 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix} \\ A_6 &= \begin{pmatrix} \cos \theta_6 & -\sin \theta_6 & 0 & 0 \\ \sin \theta_6 & \cos \theta_6 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix} \end{aligned}$$

**Step 1:** Form the product:

$$A_1^{-1}T = A_2A_3A_4A_5A_6$$

$$\begin{pmatrix} \cos \theta_1 & \sin \theta_1 & 0 & 0 \\ 0 & 0 & 1 & 0 \\ \sin \theta_1 & -\cos \theta_1 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} n_x & o_x & a_x & p_x \\ n_y & o_y & a_y & p_y \\ n_z & o_z & a_z & p_z \\ 0 & 0 & 0 & 1 \end{pmatrix} = RHS$$

$$RHS = \begin{pmatrix} c_{234}c_5c_6 - s_{234}s_6 & -c_{234}c_5s_6 - s_{234}c_6 & c_{234}s_5 & a_4c_{234} + a_3c_{23} + a_2c_2 \\ s_{234}c_5c_6 + c_{234}s_6 & -s_{234}c_5s_6 + c_{234}c_6 & s_{234}s_5 & a_4s_{234} + a_3s_{23} + a_2s_2 \\ -s_5c_6 & s_5s_6 & c_5 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}$$

Compare the (3,4) entries on both sides:

$$\sin \theta_1 p_x - \cos \theta_1 p_y = 0 \implies \frac{\sin \theta_1}{\cos \theta_1} = \frac{p_y}{p_x} = \tan \theta_1$$

There will be two solutions for  $\theta_1$  and they differ by  $\pi$ , ( $180^\circ$ ):

Therefore:  $\theta_1 = \text{atan2}(p_x, p_y)$  or  $\theta_1 = \text{atan2}(-p_x, -p_y)$

**Step 2:** Note that no further variables are constrained in writing:

$$A_2^{-1}A_1^{-1}T = A_3A_4A_5A_6 \quad \text{or} \quad A_3^{-1}A_2^{-1}A_1^{-1}T = A_4A_5A_6$$

**Step 3:** Now form:

$$\overline{LHS} = A_4^{-1}A_3^{-1}A_2^{-1}A_1^{-1}T = A_5A_6 = \overline{RHS}$$

Where,

$$\overline{RHS} = \begin{pmatrix} c_5c_6 & -c_5s_6 & s_5 & 0 \\ s_5c_6 & -s_5s_6 & -c_5 & 0 \\ s_6 & c_6 & 0 & 0 \\ 0 & 0 & 0 & 1 \end{pmatrix}$$

and  $\overline{LHS}$  has the form (some terms are not explicitly written):

$$\overline{LHS} = \left( \begin{array}{c|c|c|c} \star & \star & a_x c_1 c_{234} + a_y s_1 c_{234} & p_x c_1 c_{234} + p_y s_1 c_{234} \\ \hline \star & \star & +a_z s_{234} & +p_z s_{234} - a_2 c_{23} - a_3 c_4 - a_4 \\ \hline -n_x c_1 s_{234} - n_y s_1 s_{234} & -o_x c_1 s_{234} - o_y s_1 s_{234} & -a_x s_1 + a_y c_1 & -p_x s_1 + p_y c_1 \\ \hline +n_z c_{234} & +o_z c_{234} & -a_x c_1 s_{234} - a_y s_1 s_{234} & \star \\ \hline 0 & 0 & +a_z c_{234} & 1 \end{array} \right)$$

Comparing the (3, 3) entries on both sides we see that:

$$\begin{aligned}
a_x c_1 s_{234} + a_y s_1 s_{234} - a_z c_{234} &= 0 \\
(a_x c_1 + a_y s_1) s_{234} &= a_z c_{234} \\
\implies \theta_2 + \theta_3 + \theta_4 &= \text{atan2}(a_x c_1 + a_y s_1, a_z) \\
\text{or } \theta_2 + \theta_3 + \theta_4 &= \text{atan2}(-(a_x c_1 + a_y s_1), -a_z) \\
&\text{(solutions vary by 180 degrees)}
\end{aligned}$$

**Step 4:** We now return to Step 1 (where we compared entries in  $A_1^{-1}T = A_2 A_3 A_4 A_5 A_6$  and examine entries (1, 4) and (2, 4):

$$\begin{aligned}
a_4 c_{234} + a_3 c_{23} + a_2 c_2 &= p_x c_1 + p_y s_1 \\
a_4 s_{234} + a_3 s_{23} + a_2 s_2 &= p_z
\end{aligned}$$

This is just like the planar manipulator problem we solved earlier which allows us to write:

$$\begin{aligned}
a_2 \cos \theta_2 + a_3 \cos(\theta_2 + \theta_3) &= \bar{x} \\
a_2 \sin \theta_2 + a_3 \sin(\theta_2 + \theta_3) &= \bar{y} \\
\text{where } \bar{x} &= p_x c_1 + p_y s_1 - a_4 c_{234} \quad \text{and} \quad \bar{y} = p_z - a_4 s_{234}
\end{aligned}$$

Using the ‘‘cosine law’’ we can write:

$$\begin{aligned}
\cos \theta_3 &= \frac{\bar{x}^2 + \bar{y}^2 - a_2^2 - a_3^2}{2a_2 a_3} \\
\sin \theta_3 &= \pm \sqrt{1 - \cos^2 \theta_3}
\end{aligned}$$

For each of these solutions (8 of them) write:

$$\begin{pmatrix} a_2 + a_3 \cos \theta_3 & -a_3 \sin \theta_3 \\ a_3 \sin \theta_3 & a_2 + a_3 \cos \theta_3 \end{pmatrix} \begin{pmatrix} \cos \theta_2 \\ \sin \theta_2 \end{pmatrix} = \begin{pmatrix} \bar{x} \\ \bar{y} \end{pmatrix}$$

now let  $\theta_2 = \text{tan2}(\zeta_1, \zeta_2)$  where:

$$\begin{pmatrix} \zeta_1 \\ \zeta_2 \end{pmatrix} = \frac{1}{a_2^2 + a_3^2 + 2a_2 a_3 \cos \theta_3} \begin{pmatrix} a_2 + a_3 \cos \theta_3 & a_3 \sin \theta_3 \\ -a_3 \sin \theta_3 & a_2 + a_3 \cos \theta_3 \end{pmatrix} \begin{pmatrix} \bar{x} \\ \bar{y} \end{pmatrix}$$

**Step 5:**

$\theta_5$  is found by equating entries (1, 3) and (2, 3) of the expression in Step 3,  $\overline{LHS} = \overline{RHS}$ , which results in:

$$\begin{aligned}
\cos \theta_5 &= a_x s_1 - a_y c_1 \\
\sin \theta_5 &= a_x c_1 c_{234} + a_y s_1 c_{234} + a_z s_{234}
\end{aligned}$$

**Step 6:**  $\theta_6$  is obtained by comparing (3, 1), (3, 2) of the expression in Step 3,  $\overline{LHS} = \overline{RHS}$ , which results in:

$$\begin{aligned}\cos \theta_6 &= -o_x c_1 s_{234} - o_y s_1 s_{234} + o_z c_{234} \\ \sin \theta_6 &= -n_x c_1 s_{234} - n_y s_1 s_{234} + n_z c_{234}\end{aligned}$$

Closed form solutions can also be found for the PUMA 560 (see CRAIG in the references).

### Differential Relationships:

Let

$$\begin{aligned}x &= f(\theta) \quad (\text{e.g., } f : T^6 = S^1 \times S^1 \times S^1 \times S^1 \times S^1 \times S^1 \longrightarrow SE(3), S^1 \text{ is the unit circle}) \\ \dot{x} &= \frac{\partial f(\theta)}{\partial \theta} \dot{\theta} \\ \dot{\theta} &= \left( \frac{\partial f(\theta)}{\partial \theta} \right)^{-1} \dot{x}\end{aligned}$$

Note that in the above the inverse computation is “doable” in most cases.

The only problem with this would occur if  $\frac{\partial f}{\partial \theta}$  is singular (recall the singular configurations of the planar 2-link manipulator).

$$\begin{pmatrix} x \\ y \end{pmatrix} = \begin{pmatrix} f_1(\theta_1, \theta_2) \\ f_2(\theta_1, \theta_2) \end{pmatrix} = \begin{pmatrix} r_1 \cos \theta_1 + r_2 \cos(\theta_1 + \theta_2) \\ r_1 \sin \theta_1 + r_2 \sin(\theta_1 + \theta_2) \end{pmatrix}$$

Then:

$$J = \begin{pmatrix} \frac{\partial f_1}{\partial \theta_1} & \frac{\partial f_1}{\partial \theta_2} \\ \frac{\partial f_2}{\partial \theta_1} & \frac{\partial f_2}{\partial \theta_2} \end{pmatrix} = \begin{pmatrix} -r_1 \sin \theta_1 - r_2 \sin(\theta_1 + \theta_2) & -r_2 \sin(\theta_1 + \theta_2) \\ r_1 \cos \theta_1 + r_2 \cos(\theta_1 + \theta_2) & r_2 \cos(\theta_1 + \theta_2) \end{pmatrix}$$

That makes:

$$\begin{aligned}\det J &= r_1 r_2 (\sin(\theta_1 + \theta_2) \cos \theta_1 - \sin \theta_1 \cos(\theta_1 + \theta_2)) \\ &= r_1 r_2 \sin \theta_2\end{aligned}$$

Kinematic singularity exists when  $\theta_2 = 0$ , or  $\theta_2 = 180^\circ$ .

Note: Kinematic singularities are configurations where the Jacobian function loses rank:

Problem: Consider the 2-link manipulator in the figure below at the (near singularity) configurations shown. We assume the two links have the same length  $r_1 = r_2$ . We wish to move the tip at unit velocity from position  $(\epsilon, 0)$  (which corresponds to the manipulator shown in the “solid” configuration) to position  $(0, \epsilon)$ , (which corresponds to the manipulator shown in the “dashed” configuration) a distance of  $\sqrt{2}\epsilon$ . For this to happen  $\dot{\theta}$  would need to change very rapidly.

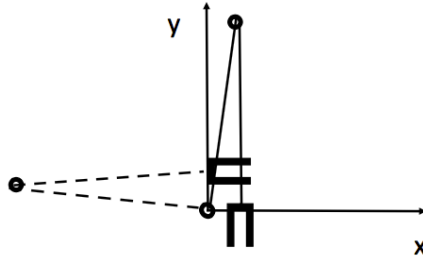


Figure 1: **Two Configurations**

Under diffeomorphic changes of coordinates the form of the Jacobian changes but singularities are invariant. Example, given a nonlinear function  $y = f(x)$ , consider mutually inverse diffeomorphisms  $u = \phi(x)$ ,  $x = \psi(u)$ . Let  $g(u) = f \circ \psi(u)$ :

$$\frac{\partial g}{\partial u} = \frac{\partial f}{\partial x}(\psi(u)) \frac{\partial \psi}{\partial u}$$

This is singular if and only if  $\frac{\partial f}{\partial x}$  is singular since  $\frac{\partial \psi}{\partial u}$  is never singular.